

DGE-660TD



- Built-in Gigabit Ethernet Port
- Windows XP Compatible
- Supports Full-duplex Operation—20/200/2000Mbps
- Compatible with Existing 10/100Mbps Networks
- Supports Auto-negotiation
- Minimal Power Consumption for Increased Battery Life
- Hot Swappable

GigaExpress[®] 32-bit Gigabit Ethernet Cardbus Notebook Adapter

The D-Link DGE-660TD Gigabit Cardbus Notebook Adapter equips your notebook computer for lightning fast speeds across your home or office network. Waiting hours for large audio and video file transfers are a thing of the past. The D-Link DGE-660TD gives you the power to bring your network up to the next level. With the DGE-660TD Gigabit Cardbus Notebook Adapter you can send and receive data at rates up to 10x faster than a 100Mbps network¹. And with Gigabit technology, you have the power of a full-duplex environment. The DGE-660TD is ideal for transferring large files such as pictures, music, video, PowerPoint, Auto-CAD, and more.

The D-Link DGE-660TD 32-bit Gigabit Cardbus Notebook Adapter is PCMCIA compliant, so compatibility

with your laptop computer is never a problem. Using your laptop on multiple networks with varying network speeds has never been easier. There is no need to manually configure your card each time you move between your 100Mbps and Gigabit network. The DGE-660TD supports auto-negotiation, and automatically adjusts to the current network speed. This cardbus will run in most Windows environments including Microsoft 98SE, Me, 2000, and XP. Also, the DGE-660TD is Hot-Swappable, so there's no need to power down your laptop when installing and removing the device. With the included Auto Run CD, installation has never been easier. Bring your laptop into the Gigabit generation with D-Link's DGE-660TD Gigabit Cardbus Notebook Adapter.

GigaExpress®

32-bit Gigabit Ethernet Cardbus Notebook Adapter



DGE-660TD

SPECIFICATIONS

Drivers Supported

- Microsoft Windows 98SE, Me
- Microsoft Windows 2000
- Microsoft Windows XP
- Refer to manual for further details

Standards

- IEEE 802.3 10BASE-T Ethernet
- IEEE 802.3u 100BASE-TX Fast Ethernet
- IEEE 802.3ab 1000BASE-T
- PCMCIA 2.x
- 32-bit Cardbus

Network Media

- 10BASE-T Ethernet:
2-pair UTP Cat. 3,4,5 up to 10Mbps
- 100BASE-TX Fast Ethernet:
2-pair UTP Cat. 5, up to 100Mbps
- 1000BASE-T Gigabit Ethernet:
4-pair UTP Cat. 5, up to 1000Mbps,
Recommended Cat5E for Gigabit
Operation

Diagnostic LEDs

- 100M Link/ Activity
- 1000M Link/ Activity

Host Interface

PCMCIA Type II 32-bit CardBus

Protocol

CSMA/CD

¹ Speed rate based on IEEE Standard. Actual data throughput will vary. Network conditions and environmental notebook factors may lower actual data throughput rate.

Network Data Transfer Rate

- Ethernet: 10Mbps (Half-duplex)
- Ethernet: 20Mbps (Full-duplex)
- Fast Ethernet: 100Mbps (Half-duplex)
- Fast Ethernet: 200Mbps (Full-duplex)
- Gigabit Ethernet: 2000Mbps (Full-duplex)

Humidity

- Operating: 10% ~ 90% RH
- Storage: 5% ~ 90% RH

Compliances

- FCC Class B
- CE mark Class B
- VCCI-B

Dimensions


4.69in (L) x 2.09in (W) x .59in (H)
11.91cm (L) x 5.30cm (W) x 1.49cm (H)

Weight:

1.76 ounces / 0.05kg

Warranty

- 2 Years

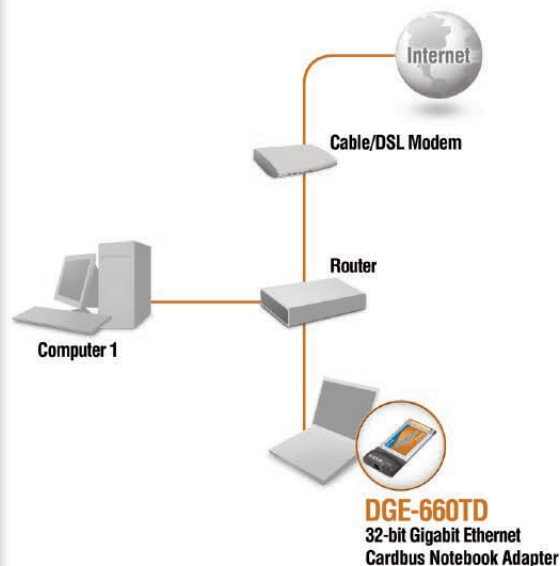

D-Link Systems, Inc. 17595 Mt. Hermann Fountain Valley CA 92708-4160 www.dlink.com
©Copyright D-Link Systems, Inc. 2004. All rights reserved. D-Link® is a registered trademark of D-Link Systems, Inc.
Other trademarks or registered trademarks are the property of their respective manufacturers or owners.
Price and specifications are subject to changes without notice. See inside package for warranty details.

D-Link®
Building Networks for People